

The logo for Snyder Equipment, Inc. features the word "SNYDER" in large, bold, white, sans-serif capital letters. This text is set against a solid blue rectangular background. Below the blue background is a horizontal yellow bar. To the left of the yellow bar is a solid yellow circle. To the right of the yellow bar, the words "Equipment, Inc." are written in a smaller, blue, sans-serif font. Below "Equipment, Inc." is the tagline "Storing, Rolling, Lifting since 1947" in an even smaller, blue, italicized sans-serif font.

SNYDER

Equipment, Inc.

Storing, Rolling, Lifting since 1947

PRODUCT INFORMATION

MECO CANTILEVER RACK CATALOG

2946 Larimer St. Denver, CO 80205

303-295-1100 / 800-373-7693

FAX 303-295-2464

Email info@snyderequipment.com

www.snyderequipment.com



HEAVY DUTY ADJUSTABLE

STANDARD HEAVY DUTY UPRIGHTS

FOR YOUR NORMAL HEAVY DUTY INDUSTRIAL STORAGE REQUIREMENTS

A MECO OMAHA rack system can be specifically designed to meet your individual requirements. MECO OMAHA representatives will work with you to develop the most feasible and economical rack system for your special situation.

Uprights are 45,000 PSI minimum yield steel

SINGLE SIDED UPRIGHTS					
HEIGHT OF UPRIGHT	LENGTH OF BASE	LENGTH OF ARM	WEIGHT (LBS)	CAPACITY (LBS)	MODEL NO.
8'	31"	12" & 18"	237	28,600 & 24,700	U831
	37"	24"	245	21,500	U837
	49"	30"	263	18,300	U849
	49"	36"	263	16,000	U849
	61"	42"	281	14,200	U861
	61"	48"	281	12,800	U861
	74"	54" & 60"	299	11,600 & 10,700	U874
10'	31"	12" & 18"	275	28,500 & 24,600	U1031
	37"	24"	283	21,300	U1037
	49"	30"	301	18,200	U1049
	49"	36"	301	15,800	U1049
	61"	42"	319	14,100	U1061
	61"	48"	319	12,600	U1061
	74"	54" & 60"	337	11,500 & 10,600	U1074
12'	31"	12" & 18"	311	28,200 & 24,400	U1231
	37"	24"	319	20,900	U1237
	49"	30"	337	17,800	U1249
	49"	36"	337	15,600	U1249
	61"	42"	355	13,900	U1261
	61"	48"	355	12,500	U1261
	74"	54" & 60"	373	11,400 & 10,500	U1274
14'	37"	12" & 18"	358	27,400 & 23,400	U1437
	37"	24"	358	20,200	U1437
	49"	30"	376	17,600	U1449
	49"	36"	376	15,400	U1449
	61"	42"	393	13,700	U1461
	61"	48"	393	12,400	U1461
	74"	54" & 60"	411	11,300 & 10,400	U1474
15'	37"	12" & 18"	378	27,100 & 22,600	U1537
	37"	24"	378	19,200	U1537
	49"	30"	395	16,900	U1549
	49"	36"	395	15,000	U1549
	61"	42"	413	13,600	U1561
	61"	48"	413	12,300	U1561
	74"	54" & 60"	431	11,200 & 10,300	U1574
16'	37"	12" & 18"	396	23,700 & 20,300	U1637
	37"	24"	396	17,600	U1637
	49"	30"	413	15,300	U1649
	49"	36"	413	14,000	U1649
	61"	42"	431	12,900	U1661
	61"	48"	431	12,000	U1661
	74"	54" & 60"	449	11,100 & 10,300	U1674
18'	49"	12" & 18"	449	22,200 & 19,200	U1849
	49"	24"	449	16,700	U1849
	49"	30"	449	14,700	U1849
	49"	36"	449	13,600	U1849
	61"	42"	466	12,700	U1861
	61"	48"	466	11,900	U1861
	74"	54" & 60"	484	11,000 & 10,000	U1874
20'	49"	12" & 18"	484	20,600 & 17,800	U2049
	49"	24"	484	15,800	U2049
	49"	30"	484	13,900	U2049
	49"	36"	484	12,800	U2049
	61"	42"	501	11,900	U2061
	61"	48"	501	11,200	U2061
	74"	54" & 60"	520	10,500 & 9,800	U2074

DOUBLE SIDED UPRIGHTS					
HEIGHT OF UPRIGHT	LENGTH OF BASE	LENGTH OF ARM	WEIGHT (LBS)	CAPACITY (LBS)	MODEL NO.
8'	53"	12" & 18"	273	57,200 & 49,400	DU853
	65"	24"	290	43,000	DU865
	82"	30"	315	36,600	DU882
	82"	36"	315	32,000	DU882
	106"	42"	349	28,400	DU8106
	106"	48"	349	25,600	DU8106
	130"	54" & 60"	384	23,200 & 21,400	DU8130
10'	53"	12" & 18"	311	57,000 & 49,200	DU1053
	65"	24"	328	42,600	DU1065
	82"	30"	353	36,400	DU1082
	82"	36"	353	31,600	DU1082
	106"	42"	387	28,200	DU10106
	106"	48"	387	25,200	DU10106
	130"	54" & 60"	422	23,000 & 21,200	DU10130
12'	53"	12" & 18"	347	56,400 & 48,800	DU1253
	65"	24"	364	41,800	DU1265
	82"	30"	389	35,600	DU1282
	82"	36"	389	31,200	DU1282
	106"	42"	423	27,800	DU12106
	106"	48"	423	25,000	DU12106
	130"	54" & 60"	458	22,800 & 21,000	DU12130
14'	65"	12" & 18"	402	54,800 & 46,800	DU1465
	65"	24"	402	40,400	DU1465
	82"	30"	427	35,200	DU1482
	82"	36"	427	30,800	DU1482
	106"	42"	462	27,400	DU14106
	106"	48"	462	24,800	DU14106
	130"	54" & 60"	496	22,600 & 20,800	DU14130
15'	65"	12" & 18"	422	54,200 & 45,200	DU1565
	65"	24"	422	38,400	DU1565
	82"	30"	447	33,800	DU1582
	82"	36"	447	30,000	DU1582
	106"	42"	482	27,200	DU15106
	106"	48"	482	24,600	DU15106
	130"	54" & 60"	516	22,400 & 20,600	DU15130
16'	65"	12" & 18"	440	47,400 & 40,600	DU1665
	65"	24"	440	35,200	DU1665
	82"	30"	465	30,600	DU1682
	82"	36"	465	28,000	DU1682
	106"	42"	499	25,800	DU16106
	106"	48"	499	24,000	DU16106
	130"	54" & 60"	534	22,200 & 20,600	DU16130
18'	82"	12" & 18"	500	44,400 & 38,400	DU1882
	82"	24"	500	33,400	DU1882
	82"	30"	500	29,400	DU1882
	82"	36"	500	27,200	DU1882
	106"	42"	535	25,400	DU18106
	106"	48"	535	23,800	DU18106
	130"	54" & 60"	569	22,000 & 20,000	DU18130
20'	82"	12" & 18"	536	41,200 & 35,600	DU2082
	82"	24"	536	31,600	DU2082
	82"	30"	536	27,800	DU2082
	82"	36"	536	25,600	DU2082
	106"	42"	570	23,800	DU20106
	106"	48"	570	22,400	DU20106
	130"	54" & 60"	604	21,000 & 19,600	DU20130

BRACE SETS

All braces can be used on either STANDARD HEAVY DUTY or EXTRA HEAVY DUTY (X SERIES) uprights.

LENGTH*	FOR 8' UPRIGHTS SET OF TWO		FOR 10' - 14' UPRIGHTS SET OF THREE		FOR 15' - 20' UPRIGHTS SET OF FOUR INCLUDING X-BRACING	
	MODEL NO.	WEIGHT	MODEL NO.	WEIGHT	MODEL NO.	WEIGHT
24"	2B24	21 lbs	3B24	31 lbs	4B24X	66 lbs
36"	2B36	28 lbs	3B36	41 lbs	4B36X	81 lbs
42"	2B42	31 lbs	3B42	47 lbs	4B42X	90 lbs
48"	2B48	35 lbs	3B48	52 lbs	4B48X	97 lbs
60"	2B60	42 lbs	3B60	62 lbs	4B60X	113 lbs
72"	2B72	49 lbs	3B72	73 lbs	4B72X	130 lbs
84"	2B84	56 lbs	3B84	83 lbs	4B84X	147 lbs
96"	2B96	63 lbs	3B96	94 lbs	4B96XX	182 lbs
120"	2B120	113 lbs	3B120	170 lbs	4B120XX	283 lbs

*Length of braces is measured from center of upright to center of upright.

ALL WEIGHTS INCLUDE HARDWARE



CANTILEVER STOCK RACK

EXTRA HEAVY DUTY UPRIGHTS - X SERIES

FOR STORAGE REQUIREMENTS WHICH DEMAND HEAVIER CAPACITY RACKS

SINGLE SIDED UPRIGHTS					
HEIGHT OF UPRIGHT	LENGTH OF BASE	LENGTH OF ARM	WEIGHT (LBS)	CAPACITY (LBS)	MODEL NO.
12'	40"	24"	410	28,700	XU1240
	52"	30"	432	24,800	XU1252
	52"	36"	432	21,900	XU1252
	64"	42"	454	19,600	XU1264
	64"	48"	454	17,700	XU1264
	76"	54"	477	16,100	XU1276
76"	60"	477	14,900	XU1276	
14'	40"	24"	455	28,400	XU1440
	52"	30"	477	24,700	XU1452
	52"	36"	477	21,000	XU1452
	64"	42"	499	19,100	XU1464
	64"	48"	499	17,600	XU1464
	76"	54"	522	16,000	XU1476
76"	60"	522	14,600	XU1476	
15'	52"	24"	497	28,200	XU1552
	52"	30"	497	22,600	XU1552
	52"	36"	497	20,700	XU1552
	64"	42"	519	18,900	XU1564
	64"	48"	519	17,400	XU1564
	76"	54"	542	15,900	XU1576
76"	60"	542	14,500	XU1576	
16'	52"	24"	522	27,600	XU1652
	52"	30"	522	24,300	XU1652
	52"	36"	522	20,500	XU1652
	64"	42"	544	18,700	XU1664
	64"	48"	544	17,200	XU1664
	76"	54"	567	15,700	XU1676
76"	60"	567	14,400	XU1676	
18'	52"	24"	565	25,900	XU1852
	52"	30"	565	23,100	XU1852
	52"	36"	565	20,400	XU1852
	64"	42"	587	18,200	XU1864
	64"	48"	587	16,800	XU1864
	76"	54"	610	15,300	XU1876
76"	60"	610	14,100	XU1876	
20'	52"	24"	607	25,300	XU2052
	52"	30"	607	21,800	XU2052
	52"	36"	607	19,700	XU2052
	64"	42"	629	17,600	XU2064
	64"	48"	629	16,300	XU2064
	76"	54"	652	14,900	XU2076
76"	60"	652	13,800	XU2076	

DOUBLE SIDED UPRIGHTS					
HEIGHT OF UPRIGHT	LENGTH OF BASE	LENGTH OF ARM	WEIGHT (LBS)	CAPACITY (LBS)	MODEL NO.
12'	66"	24"	464	57,400	XDU1266
	84"	30"	498	49,600	XDU1284
	84"	36"	498	43,800	XDU1284
	108"	42"	542	39,200	XDU12108
	108"	48"	542	35,400	XDU12108
	132"	54"	586	32,200	XDU12132
132"	60"	586	29,800	XDU12132	
14'	66"	24"	509	56,800	XDU1466
	84"	30"	543	49,400	XDU1484
	84"	36"	543	42,000	XDU1484
	108"	42"	587	38,200	XDU14108
	108"	48"	587	35,200	XDU14108
	132"	54"	631	32,000	XDU14132
132"	60"	631	29,200	XDU14132	
15'	84"	24"	563	56,400	XDU1584
	84"	30"	563	45,200	XDU1584
	84"	36"	563	41,400	XDU1584
	108"	42"	607	37,800	XDU15108
	108"	48"	607	34,800	XDU15108
	132"	54"	651	31,800	XDU15132
132"	60"	651	29,000	XDU15132	
16'	84"	24"	588	55,200	XDU1684
	84"	30"	588	48,600	XDU1684
	84"	36"	588	41,000	XDU1684
	108"	42"	632	37,400	XDU16108
	108"	48"	632	34,400	XDU16108
	132"	54"	676	31,400	XDU16132
132"	60"	676	28,800	XDU16132	
18'	84"	24"	630	51,800	XDU1884
	84"	30"	630	46,200	XDU1884
	84"	36"	630	40,800	XDU1884
	108"	42"	674	36,400	XDU18108
	108"	48"	674	33,600	XDU18108
	132"	54"	719	30,600	XDU18132
132"	60"	719	28,200	XDU18132	
20'	84"	24"	673	50,600	XDU2084
	84"	30"	673	43,600	XDU2084
	84"	36"	673	39,400	XDU2084
	108"	42"	717	35,200	XDU20108
	108"	48"	717	32,600	XDU20108
	132"	54"	761	29,800	XDU20132
132"	60"	761	27,600	XDU20132	

MECO OMAHA X-SERIES CANTILEVER RACK solves your extra heavy duty storage problems and easily handles your toughest storage requirements. Contact your MECO OMAHA representative for your special storage needs.

Uprights are 45,000 PSI minimum yield steel

ARMS can be used on either STANDARD HEAVY DUTY or EXTRA HEAVY DUTY (X SERIES) uprights. Capacities are based on an evenly distributed load. **NOTE:** Arm lips are not intended to bear any portion of the load.

STANDARD STRAIGHT ARMS				
LENGTH	CAPACITY	WEIGHT	MODEL NO. WITHOUT LIP	MODEL NO. WITH LIP
12"	3000 lbs	9 lbs	SA12	SA12L
18"	2500 lbs	11 lbs	SA18	SA18L
24"	2000 lbs	13 lbs	SA24	SA24L
30"	1500 lbs	15 lbs	SA30	SA30L
36"	1200 lbs	17 lbs	SA36	SA36L
42"	1100 lbs	19 lbs	SA42	SA42L
48"	1000 lbs	21 lbs	SA48	SA48L
54"	800 lbs	24 lbs	SA54	SA54L
60"	600 lbs	26 lbs	SA60	SA60L

STRAIGHT ARMS through 48" long have a minimum pitch of 3/8" per foot to compensate for deflection. 54" and 60" arms have a minimum pitch of 5/8" per foot.

STANDARD INCLINED ARMS				
LENGTH	CAPACITY	WEIGHT	MODEL NO. WITHOUT LIP	MODEL NO. WITH LIP
12"	3000 lbs	9 lbs	IA12	IA12L
18"	2500 lbs	11 lbs	IA18	IA18L
24"	2000 lbs	13 lbs	IA24	IA24L
30"	1500 lbs	15 lbs	IA30	IA30L
36"	1200 lbs	17 lbs	IA36	IA36L
42"	1100 lbs	22 lbs	IA42	IA42L
48"	1000 lbs	23 lbs	IA48	IA48L

INCLINED ARMS have a pitch of 20 degrees or approximately 4.36" per foot.

HEAVY DUTY AND EXTRA HEAVY DUTY STRAIGHT ARMS				
LENGTH	CAPACITY	WEIGHT	MODEL NO. WITHOUT LIP	MODEL NO. WITH LIP
36"	2175 lbs	28 lbs	HDSA36	HDSA36L
	3400 lbs	34 lbs	XHDSA36	XHDSA36L
42"	1865 lbs	31 lbs	HDSA42	HDSA42L
	2900 lbs	37 lbs	XHDSA42	XHDSA42L
48"	1630 lbs	34 lbs	HDSA48	HDSA48L
	2000 lbs	36 lbs	HDSA482M	HDSA48L2M
	2500 lbs	40 lbs	XHDSA48	XHDSA48L
	3000 lbs	39 lbs	XHDSA483M	XHDSA48L3M
54"	1440 lbs	38 lbs	HDSA54	HDSA54L
	2000 lbs	44 lbs	XHDSA54	XHDSA54L
60"	1300 lbs	42 lbs	HDSA60	HDSA60L
	1650 lbs	46 lbs	XHDSA60	XHDSA60L
2000 lbs	61 lbs	XHDSA602M	XHDSA60L2M	

MAXIMUM STANDARD ARMS PER UPRIGHT (UPRIGHT CAPACITIES MUST BE OBSERVED)		
UPRIGHT	SINGLE UPRIGHT	DOUBLE UPRIGHT
8'	9	18
10'	12	24
12'	14	28
14'	17	34
15'	18	36
16'	20	40
18'	22	44
20'	24	48

ALL WEIGHTS INCLUDE HARDWARE



OMAHA




SERIES 2000 ADJUSTABLE CANTILEVER RACK

HANDLES MOST MEDIUM-HEAVY LOADS • STORE LONG AND AWKWARD MATERIAL IN A COMPACT SPACE • INSTANT ACCESSIBILITY

MECO OMAHA's exclusive Series 2000 Cantilever Rack fills the capacity void between the lighter Medium Duty and the higher capacity Standard Heavy Duty rack. Smaller dimensions and 45,000 PSI minimum yield steel combine to make the Series 2000 Cantilever Rack a cost-effective alternative when heavier duty units are not required. Single and double sided units are available in the most popular upright heights of 8', 10', 12' and 14'. Eight brace lengths permit the storage of a wide variety of items. Arms are adjustable on 3" centers up and down the upright; select straight or inclined arms in lengths of 12", 18", 24", 30", 36", 42" and 48".

Additional arms, uprights and braces may be ordered at any time to add to an existing system. Series 2000 Cantilever Rack can be customized to accept most standard MECO accessories such as pipe sockets, deck supports, axle cradles and steel decks. Gray enamel finish.

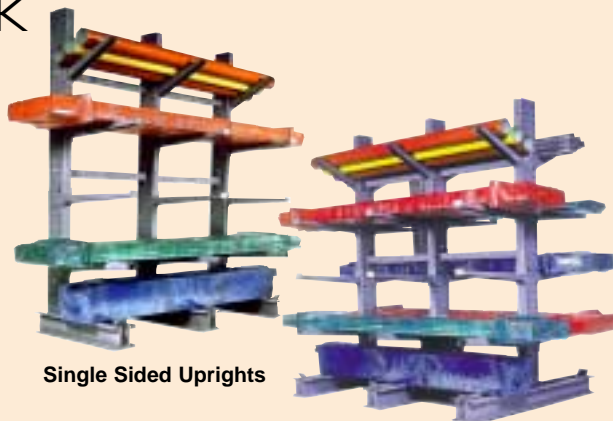

Single Sided Uprights

Double Sided Uprights

Uprights are 45,000 PSI minimum yield steel

SINGLE SIDED UPRIGHTS					
HEIGHT OF UPRIGHT	LENGTH OF BASE	LENGTH OF ARM	WEIGHT (LBS)	CAPACITY (LBS)	MODEL NO.
8'	38"	12" & 18"	188	18,100 & 15,300	2U838
	38"	24"	188	13,300	2U838
	50"	30" & 36"	201	11,800 & 10,600	2U850
	62"	42" & 48"	215	9,600 & 8,800	2U862
10'	38"	12" & 18"	217	17,400 & 14,900	2U1038
	38"	24"	217	13,100	2U1038
	50"	30" & 36"	230	11,500 & 10,300	2U1050
	62"	42" & 48"	244	9,400 & 8,600	2U1062
12'	38"	12" & 18"	245	16,800 & 14,500	2U1238
	38"	24"	245	12,600	2U1238
	50"	30" & 36"	258	11,200 & 10,200	2U1250
	62"	42" & 48"	272	9,300 & 8,500	2U1262
14'	38"	12" & 18"	272	16,200 & 14,100	2U1438
	38"	24"	272	12,300	2U1438
	50"	30" & 36"	285	10,900 & 9,800	2U1450
	62"	42" & 48"	299	8,900 & 8,300	2U1462

DOUBLE SIDED UPRIGHTS					
HEIGHT OF UPRIGHT	LENGTH OF BASE	LENGTH OF ARM	WEIGHT (LBS)	CAPACITY (LBS)	MODEL NO.
8'	59"	12" & 18"	216	36,200 & 30,600	2DU859
	59"	24"	216	26,600	2DU859
	83"	30" & 36"	243	23,600 & 21,200	2DU883
	107"	42" & 48"	270	19,200 & 17,600	2DU8107
10'	59"	12" & 18"	245	34,800 & 29,800	2DU1059
	59"	24"	245	26,200	2DU1059
	83"	30" & 36"	272	23,000 & 20,600	2DU1083
	107"	42" & 48"	299	18,800 & 17,200	2DU10107
12'	59"	12" & 18"	273	33,600 & 29,000	2DU1259
	59"	24"	273	25,200	2DU1259
	83"	30" & 36"	300	22,400 & 20,400	2DU1283
	107"	42" & 48"	327	18,600 & 17,000	2DU12107
14'	59"	12" & 18"	300	32,400 & 28,200	2DU1459
	59"	24"	300	24,600	2DU1459
	83"	30" & 36"	327	21,800 & 19,600	2DU1483
	107"	42" & 48"	354	17,800 & 16,600	2DU14107

STRAIGHT ARMS				
LENGTH	CAPACITY	WEIGHT	MODEL NO. WITHOUT LIP	MODEL NO. WITH LIP
12"	2000 lbs	7 lbs	2SA12	2SA12L
18"	1500 lbs	8 lbs	2SA18	2SA18L
24"	1200 lbs	9 lbs	2SA24	2SA24L
30"	1000 lbs	10 lbs	2SA30	2SA30L
36"	800 lbs	11 lbs	2SA36	2SA36L
42"	700 lbs	14 lbs	2SA42	2SA42L
48"	600 lbs	16 lbs	2SA48	2SA48L

STRAIGHT ARMS have a minimum pitch of 3/8" per foot to compensate for deflection. Arm capacities are based on an evenly distributed load.

INCLINED ARMS				
LENGTH	CAPACITY	WEIGHT	MODEL NO. WITHOUT LIP	MODEL NO. WITH LIP
12"	2000 lbs	7 lbs	2IA12	2IA12L
18"	1500 lbs	8 lbs	2IA18	2IA18L
24"	1200 lbs	9 lbs	2IA24	2IA24L
30"	1000 lbs	10 lbs	2IA30	2IA30L
36"	800 lbs	11 lbs	2IA36	2IA36L
42"	700 lbs	14 lbs	2IA42	2IA42L
48"	600 lbs	16 lbs	2IA48	2IA48L

INCLINED ARMS have a pitch of 20 degrees or approximately 4.36" per foot. Arm capacities are based on an evenly distributed load.

Note that arm lips are not intended to bear any portion of the load.

LENGTH*	BRACES FOR 8' UPRIGHTS – SET OF TWO		BRACES FOR 10' - 14' UPRIGHTS – SET OF THREE	
	MODEL NO.	WEIGHT	MODEL NO.	WEIGHT
23"	22B24	21 lbs	23B24	31 lbs
35"	22B36	28 lbs	23B36	41 lbs
41"	22B42	31 lbs	23B42	47 lbs
47"	22B48	35 lbs	23B48	52 lbs
59"	22B60	42 lbs	23B60	62 lbs
71"	22B72	49 lbs	23B72	73 lbs
83"	22B84	56 lbs	23B84	83 lbs
95"	22B96	63 lbs	23B96	94 lbs

* Length of braces is measured from center of upright to center of upright.

ALL WEIGHTS INCLUDE HARDWARE



MEDIUM DUTY ADJUSTABLE CANTILEVER RACK

EXCELLENT LOW COST STORAGE SYSTEM • IDEAL FOR MAINTENANCE DEPARTMENTS AND TOOL ROOMS



- EASY LOADING AND UNLOADING
- EVERY ITEM READILY AVAILABLE
- ALL WEIGHTS INCLUDE HARDWARE

High quality MECO OMAHA Medium Duty Cantilever Rack is designed for use where heavier capacities are not required. These racks are similar to our popular heavy duty racks except for the use of lighter gauge steel and smaller dimensions of component parts. Available in 6', 7', 8', 10' and 12' single and double sided uprights with a choice of eight standard brace lengths (measured on center) to accommodate 12", 18", 24", 30", 36", 42" and 48" straight or inclined arms. Arms are completely adjustable on 3" centers up and down the full length of the uprights. Two or more uprights can be assembled into a continuous system.

These sturdy and stable racks are as convenient and versatile as the heavier duty racks but priced lower to reflect the reduced capacity. Installation is quick and easy; racks can be tailored to your individual requirements. Uprights facilitate manual loading and unloading; open base design affords easy forklift accessibility. Ideal for storing bar stock, pipe, tubing, lumber and many lightweight or hard-to-stock items that must be kept off the floor.

SINGLE SIDED UPRIGHTS					
HEIGHT OF UPRIGHT	LENGTH OF BASE	LENGTH OF ARM	WEIGHT (LBS)	CAPACITY (LBS)	MODEL NO.
6'	33"	12" & 18"	82	8,100 & 6,600	MU633
	33"	24"	82	5,500	MU633
	45"	30"	90	4,700	MU645
	45"	36"	90	4,100	MU645
	57"	42" & 48"	100	3,700 & 3,300	MU657
7'	33"	12" & 18"	89	7,900 & 6,400	MU733
	33"	24"	89	5,300	MU733
	45"	30"	97	4,600	MU745
	45"	36"	97	4,100	MU745
	57"	42" & 48"	107	3,700 & 3,300	MU757
8'	33"	12" & 18"	96	7,600 & 6,300	MU833
	33"	24"	96	5,300	MU833
	45"	30"	104	4,500	MU845
	45"	36"	104	4,000	MU845
	57"	42" & 48"	114	3,600 & 3,200	MU857
10'	33"	12" & 18"	110	7,100 & 5,900	MU1033
	33"	24"	110	5,000	MU1033
	45"	30"	118	4,400	MU1045
	45"	36"	118	3,800	MU1045
	57"	42" & 48"	128	3,400 & 3,100	MU1057
12'	33"	12" & 18"	124	6,500 & 5,400	MU1233
	33"	24"	124	4,700	MU1233
	45"	30"	132	4,100	MU1245
	45"	36"	132	3,700	MU1245
	57"	42" & 48"	142	3,300 & 3,000	MU1257

DOUBLE SIDED UPRIGHTS					
HEIGHT OF UPRIGHT	LENGTH OF BASE	LENGTH OF ARM	WEIGHT (LBS)	CAPACITY (LBS)	MODEL NO.
6'	54"	12" & 18"	99	16,200 & 13,200	MDU654
	54"	24"	99	11,000	MDU654
	78"	30"	115	9,400	MDU678
	78"	36"	115	8,200	MDU678
	102"	42" & 48"	135	7,400 & 6,600	MDU6102
7'	54"	12" & 18"	106	15,800 & 12,800	MDU754
	54"	24"	106	10,600	MDU754
	78"	30"	122	9,200	MDU778
	78"	36"	122	8,200	MDU778
	102"	42" & 48"	142	7,400 & 6,600	MDU7102
8'	54"	12" & 18"	113	15,200 & 12,600	MDU854
	54"	24"	113	10,600	MDU854
	78"	30"	129	9,000	MDU878
	78"	36"	129	8,000	MDU878
	102"	42" & 48"	149	7,200 & 6,400	MDU8102
10'	54"	12" & 18"	127	14,200 & 11,800	MDU1054
	54"	24"	127	10,000	MDU1054
	78"	30"	143	8,800	MDU1078
	78"	36"	143	7,600	MDU1078
	102"	42" & 48"	163	6,800 & 6,200	MDU10102
12'	54"	12" & 18"	141	13,000 & 10,800	MDU1254
	54"	24"	141	9,400	MDU1254
	78"	30"	157	8,200	MDU1278
	78"	36"	157	7,400	MDU1278
	102"	42" & 48"	177	6,600 & 6,000	MDU12102

Uprights are 45,000 PSI minimum yield steel

STRAIGHT ARMS				
LENGTH	CAPACITY	WEIGHT	MODEL NO. WITHOUT LIP	MODEL NO. WITH LIP
12"	1000 lbs	6 lbs	MSA12	MSA12L
18"	750 lbs	7 lbs	MSA18	MSA18L
24"	600 lbs	8 lbs	MSA24	MSA24L
30"	500 lbs	9 lbs	MSA30	MSA30L
36"	400 lbs	10 lbs	MSA36	MSA36L
42"	350 lbs	13 lbs	MSA42	MSA42L
48"	300 lbs	15 lbs	MSA48	MSA48L

INCLINED ARMS				
LENGTH	CAPACITY	WEIGHT	MODEL NO. WITHOUT LIP	MODEL NO. WITH LIP
12"	1000 lbs	6 lbs	MIA12	MIA12L
18"	750 lbs	7 lbs	MIA18	MIA18L
24"	600 lbs	8 lbs	MIA24	MIA24L
30"	500 lbs	9 lbs	MIA30	MIA30L
36"	400 lbs	10 lbs	MIA36	MIA36L
42"	350 lbs	13 lbs	MIA42	MIA42L
48"	300 lbs	15 lbs	MIA48	MIA48L

STRAIGHT ARMS have a minimum pitch of 3/8" per foot to compensate for deflection. Arm capacities are based on an evenly distributed load.

INCLINED ARMS have a pitch of 20 degrees or approximately 4.36" per foot. Arm capacities are based on an evenly distributed load.

NOTE: Arm lips are not intended to bear any portion of the load.

LENGTH*	BRACES FOR 6' - 10' UPRIGHTS - SET OF TWO		BRACES FOR 12' UPRIGHTS - SET OF THREE	
	MODEL NO.	WEIGHT	MODEL NO.	WEIGHT
23"	M2B24	21 lbs	M3B24	31 lbs
35"	M2B36	28 lbs	M3B36	41 lbs
41"	M2B42	31 lbs	M3B42	47 lbs
47"	M2B48	35 lbs	M3B48	52 lbs
59"	M2B60	42 lbs	M3B60	62 lbs
71"	M2B72	49 lbs	M3B72	73 lbs
83"	M2B84	56 lbs	M3B84	83 lbs
95"	M2B96	63 lbs	M3B96	94 lbs

* Length of braces is measured from center of upright to center of upright.



CANTILEVER RACK STARTER AND ADD-ON UNITS

A COMPLETE STORAGE SYSTEM DESIGNED WITH FLEXIBILITY AND SIMPLICITY IN MIND

MECO OMAHA has assembled the most popular Standard Heavy and Medium Duty Cantilever components to create Starter and Add-On units - take the guesswork out of selecting a rack system! Order a single or double sided starter unit consisting of 2 uprights, straight arms and braces to assemble a single bay storage unit.

Create a continuous rack system with add-on units which include 1 upright, straight arms and the appropriate brace set. Choose Standard Heavy Duty models in upright heights of 8', 10' or 12'. Medium Duty models are available in 6', 8' and 10' heights and easily handle lighter capacity requirements.

STANDARD HEAVY DUTY CANTILEVER RACK

STARTER UNITS INCLUDES: 2 UPRIGHTS, STRAIGHT ARMS, 6' BRACE SET								ADD-ON UNITS INCLUDES: 1 UPRIGHT, STRAIGHT ARMS, 6' BRACE SET			
MODEL NO.	UPRIGHT		BASE	ARMS*			WEIGHT (LBS)	MODEL NO.	ARMS*		WEIGHT (LBS)
	HEIGHT (FT)	CAPACITY (LBS)	LENGTH (IN)	LENGTH (IN)	QUANTITY	CAPACITY			LENGTH (IN)	QUANTITY	
SINGLE SIDED UNITS								SINGLE SIDED UNITS			
SU8	8	21,500	37	24	8	2,000	603	AU8	24	4	326
SU10	10	15,800	49	36	12	1,200	879	AU10	36	6	476
SU12	12	12,500	61	48	16	1,000	1,119	AU12	48	8	596
DOUBLE SIDED UNITS								DOUBLE SIDED UNITS			
SDU8	8	43,000	65	24	16	2,000	797	ADU8	24	8	423
SDU10	10	31,600	82	36	24	1,200	1,147	ADU10	36	12	610
SDU12	12	25,000	106	48	32	1,000	1,551	ADU12	48	16	812

*Add Suffix "L" to Model Number for Arms with Lips.

MEDIUM DUTY CANTILEVER RACK

STARTER UNITS INCLUDES: 2 UPRIGHTS, STRAIGHT ARMS, 1 BRACE SET (47" BRACE SET FOR 6' AND 8' UPRIGHTS, 71" BRACE SET FOR 10' UPRIGHTS)								ADD-ON UNITS INCLUDES: 1 UPRIGHT, STRAIGHT ARMS, 1 BRACE SET (47" BRACE SET FOR 6' AND 8' UPRIGHTS, 71" BRACE SET FOR 10' UPRIGHTS)			
MODEL NO.	UPRIGHT		BASE	ARMS*			WEIGHT (LBS)	MODEL NO.	ARMS*		WEIGHT (LBS)
	HEIGHT (FT)	CAPACITY (LBS)	LENGTH (IN)	LENGTH (IN)	QUANTITY	CAPACITY			LENGTH (IN)	QUANTITY	
SINGLE SIDED UNITS								SINGLE SIDED UNITS			
SM6	6	8,100	33	12	6	1,000	235	AM6	12	3	135
SM8	8	5,300	33	24	8	600	291	AM8	24	4	163
SM10	10	3,800	45	36	12	400	405	AM10	36	6	227
DOUBLE SIDED UNITS								DOUBLE SIDED UNITS			
SMD6	6	16,200	54	12	12	1,000	305	AMD6	12	6	170
SMD8	8	10,600	54	24	16	600	389	AMD8	24	8	212
SMD10	10	7,600	78	36	24	400	575	AMD10	36	12	312

*Add Suffix "L" to Model Number for Arms with Lips.

