

SNYDER



Equipment, Inc.

Storing, Rolling, Lifting since 1947

PRODUCT INFORMATION

Security Mfg. private mailboxes

2946 Larimer St. Denver, CO 80205
303-295-1100 / 800-373-7693
FAX 303-295-2464
Email info@snyderequipment.com
www.snyderequipment.com

HORIZONTAL MAILBOXES

901/910 SERIES

Private Use Front and Rear Load
Recessed Installation



PICTURED HERE
Double-Wide Doors
For Flat Mail Delivery

901 SERIES

Constructed of all aluminum extrusions and materials. Standard 901 series horizontal mailboxes are available in "A" size compartment, 3" h X 6" w and configured in modules 3, 4 or 5 boxes wide and 12 boxes high. Each 1/8" extruded aluminum door swings on a continuous hinge and is equipped with a 5-pin cylinder cam lock with 3 keys (1000 changes). Doors include permanent 3/4" high engraved identification. All modules have standard 3/4" integral trim. The 3" h compartments are ideal for applications where a large number of boxes is required. **Consult our sales staff for assistance with customizing units for your specific needs.**



901 Series

CATALOG NUMBER Front Load (FL) Rear Load (RL)	Number of Boxes FL RL	Box Arrangement	Dimensions (inches)					
			Width (FL)		Width (RL)		Height	Depth
901 FL-35 901 RL-36	35 36	12H x 3W	Overall / Rough	Overall / Rough	Overall / Rough	Overall / Rough	Overall / Rough	
901 FL-47 901 RL-48	47 48	12H x 4W	23 1/8	21 5/8	21 9/16	20 1/16	40 7/16	38 15/16
901 FL-59 901 RL-60	59 60	12H x 5W	29 5/8	28 1/8	28 1/32	26 17/32	40 7/16	38 15/16
			36 1/16	34 9/16	34 9/16	33 1/16	40 7/16	38 15/16
							16 1/4	16

All Dimensions in Inches

910 SERIES

Constructed of all aluminum extrusions and materials. Standard 910 series mailboxes are the choice when space is a concern. Modules are manufactured without integral trim and the compartments are 5" h X 4" w. Standard modules are 7, 8, 9 or 10 boxes high and 4 or 5 boxes wide. All doors operate on continuous hinges and are 1/8" extruded aluminum with engraved door identification. Locks are 5 pin cylinder cam type with 3 keys (1000 changes)

FRONT LOADING: Master door swings on a continuous hinge. One compartment is required for access and cannot be used for mail delivery. The access door is equipped with a private lock. When multiple modules are used in one location all master doors can be keyed alike for convenience.

REAR LOADING: All compartments are usable for incoming mail. Lift-off or hinged rear covers are available.

Finishes

- Clear anodized aluminum
- Gold powder coat
- Silver powder coat
- Bronze powder coat



OPTIONS

- 1 1/2" Snap-on-trim
- Mail slot
- High security locking system "A" size 901 only
- 1/4" High security door "A" size only
- Identification – Window/card holders
- Engraved plastic adhesive tabs
- Black filled engraving
- Spring latch locks
- Combination Spring latch locks (910 Series)
- Access doors keyed alike

910 Series

CATALOG NUMBER Front Load (FL) Rear Load (RL)	Number of Boxes FL RL	Box Arrangement	Dimensions (inches)				
			Width (FL)	Width (RL)	Height	Depth	
910 FL-34 910 RL-35	34 35	7H x 5W	Rough	Rough	Rough	Rough	
910 FL-39 910 RL-40	39 40	8H x 5W	20 7/8	20 1/2	20 1/2	35 1/2	16
910 FL-44 910 RL-45	44 45	9H x 5W	20 7/8	20 1/2	20 1/2	45 1/2	16
910 FL-39 910 RL-40	39 40	10H x 4W	17	16 5/8	16 5/8	50 1/2	16

All Dimensions in Inches

The Carrington

The SMC Carrington Flat Mail Delivery Series is designed for university, college, school and institutional applications. The unique Carrington features convenient flat-mail delivery into 16" deep compartments. Bottom-hinged 10 1/2" wide x 2 1/8" high doors provide safety and convenience. The 22 1/2" wide space-saving 24-inch-on-center modules with integral trim are easy to specify and equally easy to install. The rough-opening width is 22 1/2" inches (Rear Load). Modules are constructed of all aluminum extrusions and materials, and doors are 1/8" thick extruded aluminum. 5-pin cam locks with 3 keys each are standard. Combination locks and the ultra-secure ALSS proprietary key system with 16 million key code combinations are options. Rear-load 10H, 12H and 24H modules provide 20, 24, and 48 compartments respectively.




ALUMINUM PRIVATE MAILBOXES



2900 SERIES Aluminum Private Mailboxes Rack Ladder Installation Rear Loading

The all aluminum construction features 1/4" extruded aluminum doors with a 5 pin cam lock (1000 changes and 2 keys). Modules are available in choice of 1, 2, 4, 8 or 12 compartments per module and finished in silver powder coat with black trim. All modules are identical in size, 23 7/8"W x 12 1/8"H x 15 1/2"D and are designed to be installed in a rack ladder system. Each column of rack ladders will hold 5 mailbox modules. Two 1/2" rack ladders are required for the first column of mailboxes and one ladder is needed for each additional column. Optional vertical engraved identification. To determine the over all width for installation, multiply 23 7/8" x number of columns and add 1/2" for the end ladders. Measurements for the rack ladder pictured: 61 1/2" O.A. height and 48 1/4" O.A. width for 2 columns.

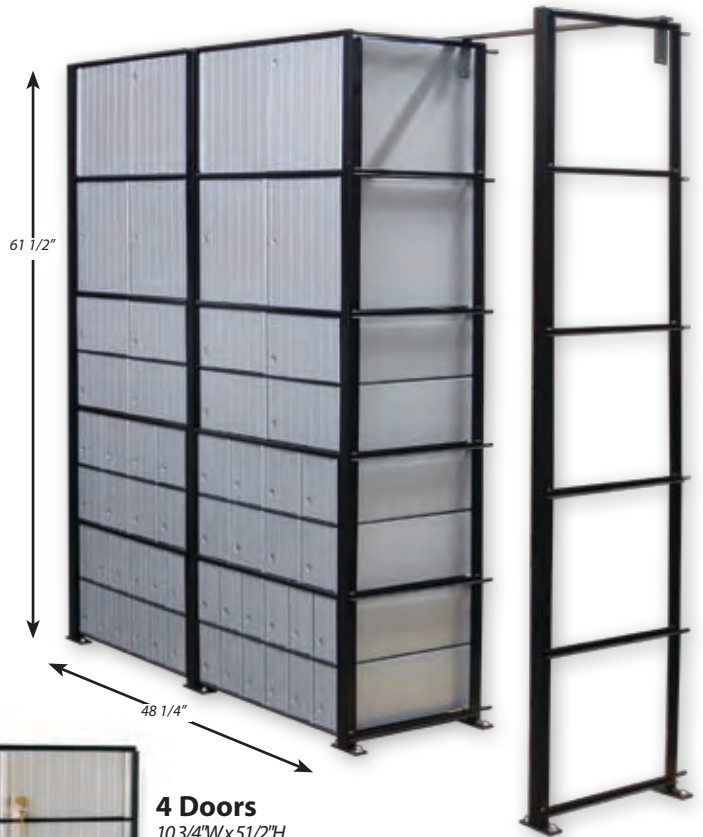

1 Door
22"W x 11 1/2"H



4 Doors
103/4"W x 51/2"H



2 Doors
103/4"W x 11 1/2"H



8 Doors
51/2"W x 51/2"H



12 Doors
31/2"W x 51/2"H

5000 SERIES Aluminum Private Mailboxes – Recessed Installation Rear Loading

Security 5000 Series mailboxes are constructed of the same material and style as the boxes used by the U.S. Postal Service in their new post office installations. Modules are available in choice of 10, 20 or 30 compartments per module. Shipped completely assembled and designed to fit between 24" on center studs. Each module measures 22 1/2"W x 29 5/8"H x 15"D. Finish is silver powder coat with black trim. Each compartment door is equipped with a 5 pin cam lock (1000 changes) and 2 keys. Shelves are high-impact polymer.

5010 • 10 Boxes • 10 1/2"W x 5 1/2"H



5020 • 20 Boxes • 5"W x 5 1/2"H



5030 • 30 Boxes • 3"W x 5 1/2"H





PRIVATE USE

2000 SERIES Rear Loading

Constructed of heavy duty extruded aluminum frames and decorative die-cast aluminum doors with gold powder coat finish. The doors are designed with an indentation for easy application of adhesive identification numbers. Each door is equipped with a 5 pin cam lock (1000 changes) and 2 keys. Shelves are high impact polymer. All modules are completely assembled and pre-drilled for easy installation. Full modules are available in a choice of 8, 16 or 30 compartments per module.

REAR LOADING:

All modules are designed to fit between 24" on center studs.

Full modules measure 22 1/2"W x 26 1/2"H x 15"D.

One half modules, 2016 1/2 (8 doors) and

2008 1/2 (4 doors) measure 22 1/2"W x 14"H x 15"D.

OPTIONS:

- Aluminum shelves
- Rear covers
- Special order – Silver finish



2030
30 Boxes
3 1/2"W x 5"H



2016-1/2 **2016**
1/2 Module 8 boxes 16 Boxes
5 1/2" wide x 6"high 5 1/2"W x 6"H



2008-1/2 **2008**
1/2 Module 4 boxes 8 Boxes
11" wide x 6"high 11"W x 6"H

Over all, 25 3/4"W x 28 3/4"H x 15"D, rough opening 24 3/8"W x 27 5/16"H x 15"D.

3000 SERIES Front Loading

FRONT LOADING:

3000 Series offers front loading convenience when space is limited. One compartment is dedicated for access to the entire module and cannot be used for incoming mail. All modules have standard integral trim and identical measurements.

OPTIONS:

- Aluminum shelves
- Special order – Silver finish



3008
8 Boxes, 11"W x 6"H



3016
16 Boxes, 5 1/2"W x 6"H



3030
30 Boxes, 3 1/2"W x 5"H

Model 2040/2050

Mail Drop/Box, Rental/Package Delivery

Available with 1 Mail Drop and 1 Lock Compartment or 2 Lock Compartments



KEY STORAGE CABINET



Designed for easy key controls, the wall mounted cabinet is made of galvanized steel and comes in textured beige powder coat finish. It is available in two sizes to accommodate 157 keys or up to 307 keys. Index cards are included.

Dimensions: 14"W x 23"H x 3"D

Classic 5000 CBU I, II, III, & IV

Private Use

Centralized delivery with tenant boxes and a parcel locker.

You have 3 private use options:

1. Secure key system with 16 million combinations, or
2. A keyless system with COMBO locks that allow user to set and re-set combinations.
3. Standard 5 pin cam locks.



Type I



Type II



Type III



Type IV



Specifications	Type I	Type II	Type III	Type IV
Overall Size with Base	62 x 30 ³ / ₄ x 17	62 x 30 ³ / ₄ x 17	62 x 30 ³ / ₄ x 17	62 x 30 ³ / ₄ x 17
Size of Compartments	3 x 12 x 16	3 x 12 x 16	3 x 12 x 16	4 ³ / ₄ x 12 x 16
Number of Compartments	8	12	16	13
Parcel Openings	2	1	2	1
Size of Parcels	(1)10 x 12 (1)13 ¹ / ₂ x 12	10 x 12	(1)10 x 12 (1)13 ¹ / ₂ x 12	10 x 12
Outgoing Receptacle	1	1	1	1
Overall Size Without a Pedestal	(31x30 3/4x17)	(31x30 3/4x17)	(45x30 3/4x17)	(45x30 3/4x17)